

# BioDigitalPC® M6



## PRODUCT OVERVIEW

ADDC has developed a micro-form factor docking station for use within integrated products such as monitors, tablets, TVs and micro client setups. Utilizing a small energy footprint, the M6 is the easiest way to integrate into larger platforms while maintaining standard connections.

The M6 docking station comes complete with a BioDigitalPC® Docking Connector, one USB 3.0 port, two USB 2.0 ports, one USB 2.0 4-pin header, one RJ-45 10/100 Mbps Ethernet connector, one PCIe x1 connector (optional), a 12VDC power connector, a Mini-DisplayPort video connector, and an external 12V PCIe power header.

BioDigitalPC® products encompass a revolutionary computing system which allows for maximum flexibility with minimum footprint, weight and energy consumption.

The M6 is compatible with all of the BioDigitalPC® products.

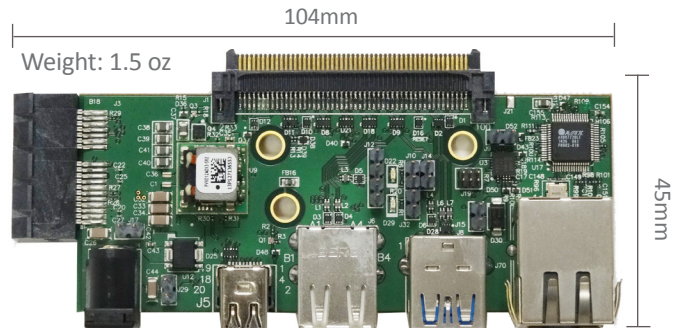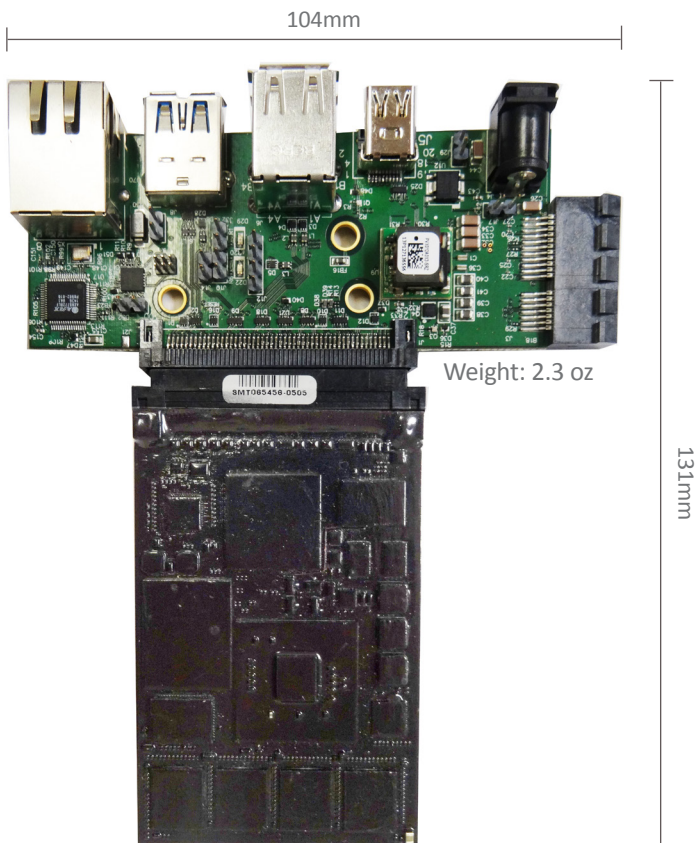

## ! SPECIFICATIONS

SKU#: ADDC-M6-I

### FEATURES:

- (1) USB 3.0 connector\*\*
- (2) USB 2.0 connectors
- (1) USB 2.0 4-pin header
- (1) RJ45 10/100 Mbps Ethernet connector
- PCIe x1 connector (optional)
- 12VDC 2.5mm center pin input power jack
- Mini-DisplayPort (HDMI capable) connector
- Reset and System On-Off headers
- 4A DC-DC converter for the 3.3V required by the Mini-DisplayPort and PCIe x1
- 5V fan header
- Red 5V power LED indicator and header
- Green Card Detect LED indicator and header
- BioDigitalPC® 100-pin Docking Connector
- (3) 4mm mounting holes
- External 12V PCIe power header
- \*\*Requires BioDigitalPC® 7, 8, or 9  
 Headers are standard 0.1" pitch

### DIMENSIONS:

104mm x 45mm x 16mm